



DECLARACIÓN DE PRESTACIONES

DoP 0244

para fischer DuoXpand (Anclajes de plástico para el uso en hormigón y mampostería)

ES

1. Código de identificación única del producto tipo: **DoP 0244**
2. Usos previstos: Anclaje de nylon de uso universal para hormigón y fábrica de ladrillo y bloque en aplicaciones no estructurales (categorías de uso a, b, c, d); véase el apéndice, especialmente los anexos B1 - B5.
3. Fabricante: fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Alemania
4. Representante autorizado: -
5. Sistemas de evaluación y verificación de la constancia de las prestaciones (EVCP): 2+
6. Documento de evaluación europeo: EAD 330284-00-0604, edition 12/2020
Evaluación técnica europea:
ETA-21/0324; 2021-12-10
Organismo de evaluación técnica:
DIBt- Deutsches Institut für Bautechnik
Organismos notificados:
2873 TU Darmstadt
7. Prestaciones declaradas:
Resistencia mecánica y estabilidad (BWR 4)
Resistencia a rotura del acero sometido a tracción: Anexo C1
Resistencia a rotura del acero o del polímero a cortante: Anexo C1
Resistencia al arranque o rotura del hormigón o del polímero, bajo carga a tracción (base de anclaje grupo a): Anexo C1

Resistencia en cualquier dirección de carga sin brazo de palanca (base de anclaje grupos b, c, d): Anexos C7 - C13
Distancia al borde y entre ejes (base de anclaje grupo a): Anexo B2
Distancia al borde y entre ejes (base de anclaje grupos b, c, d): Anexos B3 - B4
Desplazamientos bajo carga a corto y largo plazo: Anexo C2

Durabilidad: Anexo B1

Seguridad en caso de incendio (BWR 2)

Reacción al fuego: Clase A1
Resistencia al fuego: NPD

8. Documentación técnica adecuada o documentación técnica específica: -

Las prestaciones del producto identificado anteriormente son conformes con el conjunto de prestaciones declaradas. La presente declaración de prestaciones se emite, de conformidad con el Reglamento (UE) no 305/2011, bajo la sola responsabilidad del fabricante arriba identificado.

Firmado por y en nombre del fabricante por:

Dr.-Ing. Oliver Geibig, Director General Unidades de Negocio e Ingeniería
Tumlingen, 2021-12-17

Jürgen Grün, Director General de Química y Calidad

Esta DdR se ha preparado en distintos idiomas. En caso de que haya alguna controversia sobre la interpretación prevalecerá siempre la versión inglesa.

El Apéndice incluye información voluntaria y complementaria en idioma inglés que excede los requisitos legales (de idioma neutral).

Specific part

1 Technical description of the product

The fischer frame fixing DuoXpand 8 and DuoXpand 10 is a plastic anchor consisting of a plastic sleeve made of polyamide and polyoxymethylene and an accompanying specific screw of galvanised steel, of galvanised steel with an additional organic layer or of stainless steel.

The plastic sleeve is expanded by screwing in the specific screw which presses the sleeve against the wall of the drilled hole.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|---------------------------------|-------------------------|
| Reaction to fire | Class A1 |
| Resistance to fire | No performance assessed |

3.2 Mechanical resistance and stability (BWR 4)


| Essential characteristic | Performance |
|--|------------------------|
| Resistance to steel failure under tension loading | See Annex C 1 |
| Resistance to steel failure under shear loading | See Annex C 1 |
| Resistance to pull-out or concrete failure under tension loading (base material group a) | See Annex C 1 |
| Resistance in any load direction without lever arm (base material group b, c, d) | See Annexes C 7 – C 13 |
| Edge distance and spacing (base material group a) | See Annex B 2 |
| Edge distance and spacing (base material group b, c, d) | See Annex B 3 and B 4 |
| Displacements under short-term and long-term loading | See Annex C 2 |
| Durability | See Annex B 1 |

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD 330284-00-0604 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

Installed anchor DuoXpand

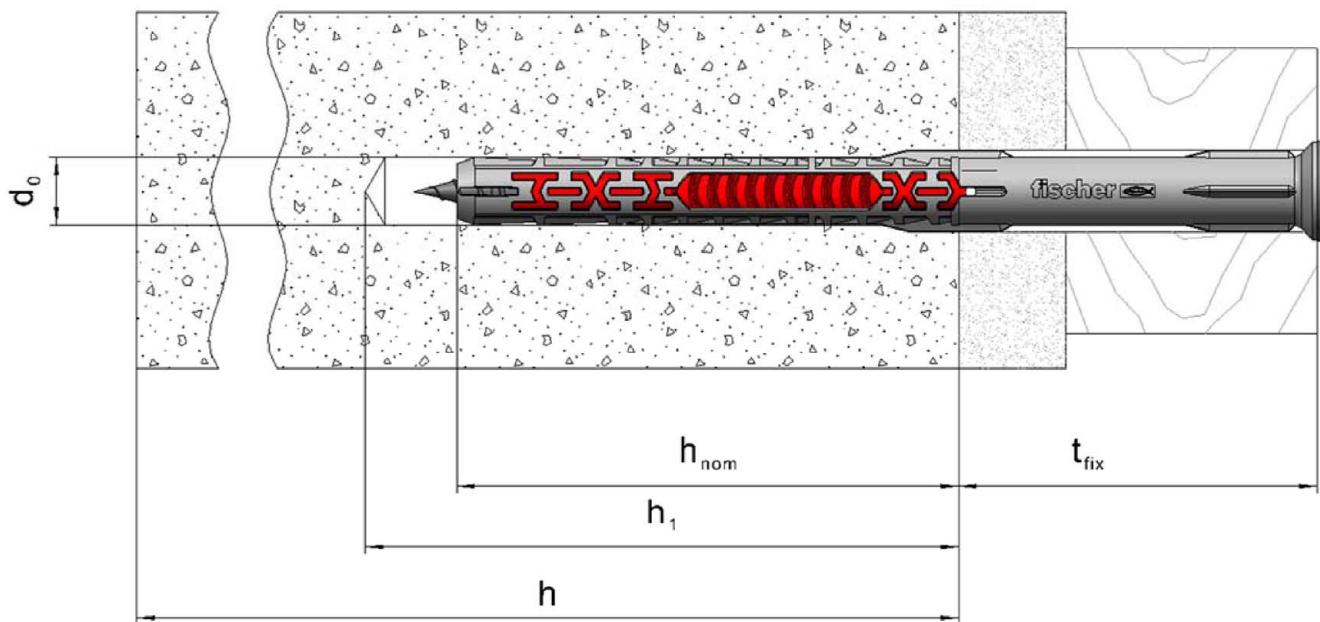

Legend

- d_0 = Nominal drill hole diameter
 h_{nom} = Overall plastic anchor embedment depth in the base material
 h_1 = Depth of drill hole to deepest point
 h = Thickness of member (wall)
 t_{fix} = Thickness of fixture and / or non-load bearing layer


Figure not to scale

fischer frame fixing DuoXpand

Product description
Installed anchor

Annex A 1

Anchor sleeves – flat collar version DuoXpand 8 and 10

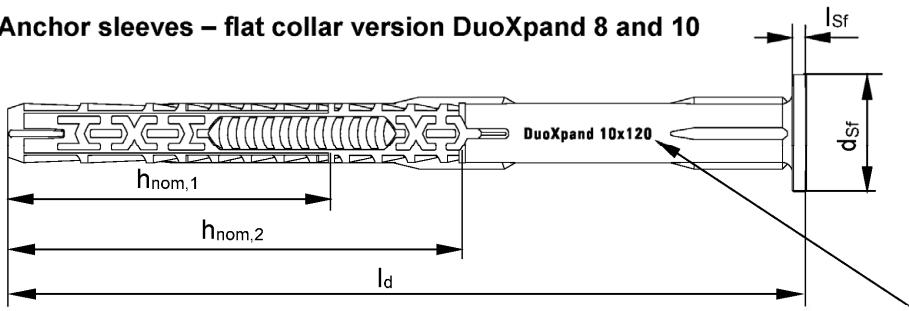


Marking:
Brand
Anchor type
Size


e.g.  DuoXpand 10x120

e.g.  DuoXpand 10x180

Countersunk version DuoXpand 8 and 10

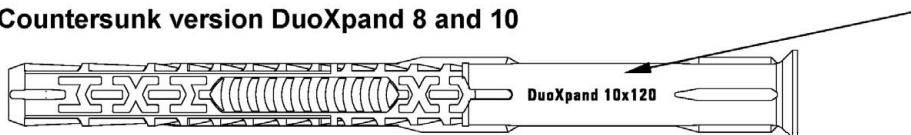


Long version DuoXpand 10 with flat collar – countersunk version also available

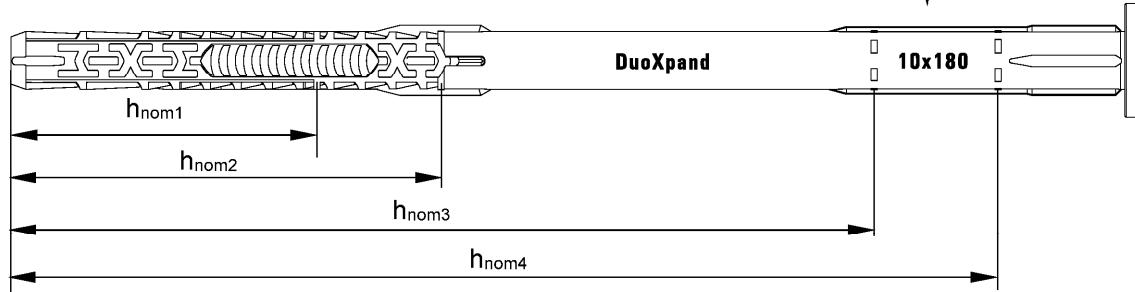


Special screws


Countersunk screw

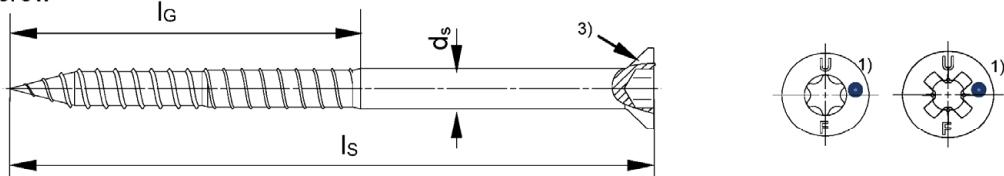

Hexagonal screw with washer

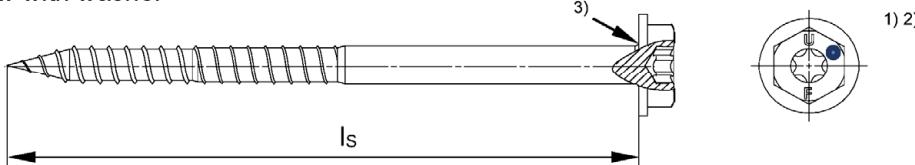

Hexagonal screw

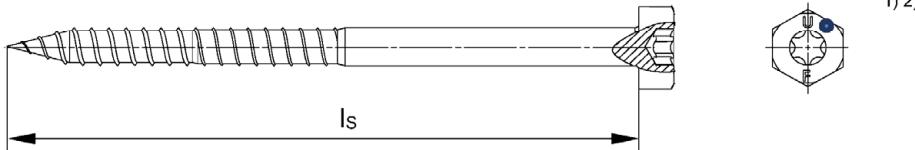

1) Additional marking for the special screw, stainless steel version: e.g. "A4" or "R" or "A2".

2) Internal driving feature for Torx bit is optional for hexagonal head.

3) Optional additional version with underhead ribs.

Figure not to scale

fischer frame fixing DuoXpand

Product description

Anchor types, special screws

Marking and dimensions

Annex A 2

Table A3.1: Dimensions

| Anchor type | Anchor sleeve | | | | | | | Special screw | | |
|-------------|--------------------------|--------------------------|--------------------------|--------------------|--------------------|-------------------------|-------------------------|---------------|---------------|----------------|
| | h_{nom} [mm] | d_{nom} [mm] | t_{fix} [mm] | min. l_d [mm] | max. l_d [mm] | l_{sf} [mm] | d_{sf} [mm] | d_s [mm] | l_G [mm] | l_s [mm] |
| DuoXpand 8 | 50 | 8 | ≥ 1 | 80 | 120 | 1,6 | 14,0 | 5,7 | ≥ 77 | $\geq l_d + 6$ |
| | 70 | | | | | | | | | |
| DuoXpand 10 | 50 | 10 | ≥ 1 | 80 | 230 | 2,2 | 18,5 | 6,9 | ≥ 77 | $\geq l_d + 7$ |
| | 70 | | | | | | | | | |
| | 140 ¹⁾ | | | | | | | | | |
| | 160 ¹⁾ | | | | | | | | | |

¹⁾ For base material Sepa Parpaing (see Annex C 11), additional h_{nom} available at $l_d \geq 160$ mm.

Table A3.2: Materials

| Name | Material |
|---------------|---|
| Anchor sleeve | - Polyamide, PA6, colour grey - Polyoxymethylene POM, colour red |
| Special screw | - Galvanised steel gvz with Zn5/Ag or Zn5/An in accordance with EN ISO 4042:2018 or - Galvanised steel gvz with Zn5/Ag or Zn5/An in accordance with EN ISO 4042:2018 with additional organic layer (Zn5/Ag/T7 or Zn5/An/T7, resp.) in three layers (total layer thickness $\geq 6 \mu\text{m}$) or - Stainless steel "A2" of corrosion resistance class CRC II in accordance with EN 1993-1-4:2006 + A1:2015 or - Stainless steel "A4" or "R" of corrosion resistance class CRC III in accordance with EN 1993-1-4:2006 + A1:2015 |

fischer frame fixing DuoXpand

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads.
- Redundant non-structural systems.

Base materials:

- Reinforced or unreinforced compacted normal weight concrete without fibres, strength classes \geq C12/15 (base material group "a"), in accordance with EN 206:2013+A1:2016, see Annex C 1 and C 3.
- Solid brick masonry (base material group "b") as per EN 771-1:2011+A1:2015, EN 771-2:2011+A1:2015 or EN 771-3:2011+A1:2015, see Annex C 3, C 7 and C 8.
Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.
- Hollow brick masonry (base material group "c"), as per EN 771-1:2011+A1:2015, EN 771-2:2011+A1:2015 or EN 771-3:2011+A1:2015, see Annex C 3 – C 6 and C 8 – C 12.
- Reinforced autoclaved aerated concrete (base material group "d"), as per EN 12602:2016, and unreinforced autoclaved aerated concrete (base material group "d") as per EN 771-4:2011+A1:2015, see Annex C 3 + C 13.
- Mortar strength class of the masonry \geq M2,5 in accordance with EN 998-2:2010.
- For other comparable base materials of the base material group "a", "b", "c" and "d" the characteristic resistance of the anchor may be determined by job site tests in accordance with TR 051:2018-04.

Temperature Range:

- c: - 40 °C to 50 °C (max. short term temperature + 50 °C and max long term temperature + 30 °C)
- b: - 40 °C to 80 °C (max. short term temperature + 80 °C and max long term temperature + 50 °C)

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions: Special screw made of zinc coated steel or stainless steel.
- The specific screw made of galvanised steel or galvanised steel with an additional organic layer may also be used in structures subject to external atmospheric exposure, if the area of the head of the screw is protected against moisture and driving rain after mounting of the fixing unit in this way, that intrusion of moisture into the anchor shaft is prevented. Therefore, there shall be an external cladding or a ventilated rainscreen mounted in front of the head of the screw and the head of the screw itself shall be coated with a soft plastic, permanently elastic bitumen-oil-combination coating (e.g. undercoating or body cavity protection for cars).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist: Special screw made of stainless steel of corrosion resistance class CRC III.

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- The anchorages are to be designed in accordance with TR 064:2018-05 under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.

Installation:

- Hole drilling by the drilling method in accordance with Annex C 1 for base material group "a", and in accordance with Annexes C 7 – C 13 for base material group "b", "c" and "d".
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature: - 20 °C to + 40 °C
- Exposure to UV due to solar radiation of the anchor not protected by rendering \leq 6 weeks.
- No ingress of water in the borehole at temperatures $< 0^{\circ}\text{C}$

fischer frame fixing DuoXpand

Intended use
Specifications

Annex B 1

Appendix 6 / 23

Table B2.1: Installation parameters

| Anchor type | | DuoXpand 8 | DuoXpand 10 |
|---|---|-------------------|--------------------|
| Nominal drill hole diameter | $d_0 = [\text{mm}]$ | 8 | 10 |
| Cutting diameter of drill bit | $d_{\text{cut}} \leq [\text{mm}]$ | 8,45 | 10,45 |
| Overall plastic anchor embedment depth in the base material ¹⁾ | $h_{\text{nom}1} \geq [\text{mm}]$ | 50 | 50 |
| | $h_{\text{nom}2} \geq [\text{mm}]$ | 70 | 70 |
| | $h_{\text{nom}3}^{2)} \geq [\text{mm}]$ | - | 140 |
| | $h_{\text{nom}4}^{2)} \geq [\text{mm}]$ | - | 160 |
| Depth of drill hole to deepest point | $h_{1,1} \geq [\text{mm}]$ | 60 | 60 |
| | $h_{1,2} \geq [\text{mm}]$ | 80 | 80 |
| | $h_{1,3}^{2)} \geq [\text{mm}]$ | - | 150 |
| | $h_{1,4}^{2)} \geq [\text{mm}]$ | - | 170 |
| Diameter of clearance hole in the fixture | $d_f \leq [\text{mm}]$ | 8,5 | 10,5 |

¹⁾ For base material group "c": If the embedment depth is higher than h_{nom} given in the Table B2.1, job site tests have to be carried out in accordance with TR 051:2018-04.

²⁾ Only valid for Sepa Parpaing see Annex C 11 at anchor length $l_d \geq 160$ mm.

Table B2.2: Minimum thickness of member, edge distance and spacing in concrete – base material group „a“¹⁾

| Anchor Type | Embed- ment depth h_{nom} [mm] | Strength class | Minimum thickness of member h_{min} [mm] | Charac- teristic edge distance $c_{\text{cr}, N}$ [mm] | Charac- teristic spacing $s_{\text{cr}, N}$ [mm] | Minimum spacing and edge distances²⁾ $s_{\text{min}}, c_{\text{min}}$ [mm] |
|--------------------|---|---------------------------|---|--|--|---|
| DuoXpand 8 | ≥ 50 | $\geq \text{C16/20}$ | 80 | 50 | 65 | $s_{\text{min}} = 50$ for $c \geq 100$ $c_{\text{min}} = 50$ for $s \geq 100$ |
| | | C12/15 | | 70 | 90 | $s_{\text{min}} = 70$ for $c \geq 140$ $c_{\text{min}} = 70$ for $s \geq 140$ |
| | ≥ 70 | $\geq \text{C16/20}$ | 100 | 50 | 70 | $s_{\text{min}} = 50$ for $c \geq 100$ $c_{\text{min}} = 50$ for $s \geq 100$ |
| | | C12/15 | | 70 | 100 | $s_{\text{min}} = 70$ for $c \geq 140$ $c_{\text{min}} = 70$ for $s \geq 140$ |
| DuoXpand 10 | ≥ 50 | $\geq \text{C16/20}$ | 80 | 50 | 70 | $s_{\text{min}} = 50$ for $c \geq 100$ $c_{\text{min}} = 50$ for $s \geq 100$ |
| | | C12/15 | | 70 | 100 | $s_{\text{min}} = 70$ for $c \geq 140$ $c_{\text{min}} = 70$ for $s \geq 140$ |
| | ≥ 70 | $\geq \text{C16/20}$ | 100 | 50 | 80 | $s_{\text{min}} = 50$ for $c \geq 100$ $c_{\text{min}} = 50$ for $s \geq 100$ |
| | | C12/15 | | 70 | 115 | $s_{\text{min}} = 70$ for $c \geq 140$ $c_{\text{min}} = 70$ for $s \geq 140$ |

¹⁾ See scheme of distances and spacing Annex B 3.

²⁾ Intermediate values by linear interpolation.

Fixing points with spacing $a \leq s_{\text{cr}, N}$ are considered as a group with a maximum characteristic resistance $N_{Rk,p}$ as per Table C1.2. For a spacing $a > s_{\text{cr}, N}$ the anchors are considered as single anchors, each with characteristic resistance $N_{Rk,p}$ as per Table C1.2.

fischer frame fixing DuoXpand

Intended use

Installation parameters

Minimum thickness of member, edge distances and spacings for use in concrete

Annex B 2

Table B3.1: Minimum thickness of member, edge distance and spacing in solid and hollow or perforated masonry – base material group “b“ and “c“

| Anchor Type | DuoXpand 8 | DuoXpand 10 |
|---|------------|-------------|
| Minimum thickness of member ¹⁾ h_{\min} [mm] | 115 | 115 |
| Single anchor | | |
| Minimum spacing a_{\min} [mm] | 250 | 250 |
| Minimum edge distance c_{\min} [mm] | 100 | 100 |
| Anchor group | | |
| Minimum spacing perpendicular to free edge $s_{1,\min}$ [mm] | 100 | 100 |
| Minimum spacing parallel to free edge $s_{2,\min}$ [mm] | 100 | 100 |
| Spacing between anchor groups and / or single anchors a_{\min} [mm] | 250 | 250 |
| Minimum edge distance c_{\min} [mm] | 100 | 100 |

¹⁾ Member thickness according to Annex C 3 – C 6.

Scheme of distance and spacing in concrete, solid and hollow or perforated masonry – base material group “a”, “b“ and “c“

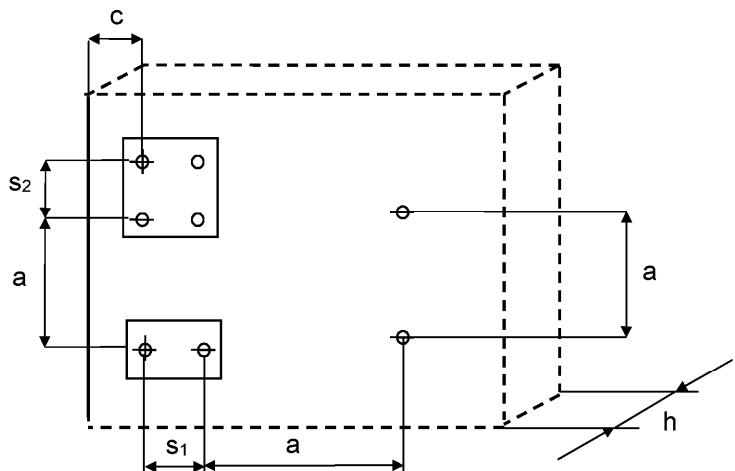


Figure not to scale

fischer frame fixing DuoXpand

Intended use

Minimum thickness of member, edge distances and spacings for use in solid, hollow or perforated masonry

Annex B 3

Table B4.1: Minimum thickness of member, edge distance and spacing in reinforced and unreinforced autoclaved aerated concrete – base material group “d”

| Anchor type | | DuoXpand 8 | DuoXpand 10 |
|---|--|------------|-------------|
| Compressive strength ¹⁾ | f_{ck} $f_{cm,decl}$ [N/mm ²] | ≥ 2 | ≥ 6 |
| Nominal embedment depth | $h_{nom} \geq$ [mm] | 70 | 70 |
| Single anchor | | | |
| Minimum thickness of member | h_{min} [mm] | 100 | 100 |
| Minimum spacing | a_{min} [mm] | 250 | 250 |
| Minimum edge distance | c_{min} [mm] | 100 | 100 |
| Anchor group | | | |
| Minimum thickness of member | h_{min} [mm] | 100 | 175 |
| Minimum edge distance | c_{min} [mm] | 100 | 100 |
| Minimum spacing perpendicular to free edge | $s_{1,min}$ [mm] | 100 | 100 |
| Minimum spacing parallel to free edge | $s_{2,min}$ [mm] | 100 | 80 |
| Spacing between anchor groups and / or single anchors | a_{min} [mm] | 250 | 250 |
| 250 | | | |

¹⁾ see table C13.1 and C13.2

Scheme of distance and spacing in autoclaved aerated concrete – base material group “d”

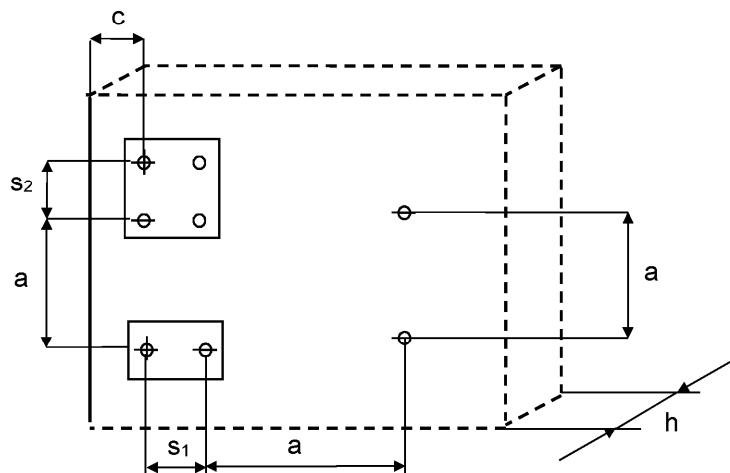


Figure not to scale

fischer frame fixing DuoXpand

Intended use

Minimum thickness of member, edge distances and spacings for use in autoclaved aerated concrete


Annex B 4

Installation instructions


The following pictures show fixing through timber in concrete and hollow brick

Summary of all kind of masonry bricks see Annex C 3 – C 6

Solid bricks



Hollow or perforated bricks





1. Drill the bore hole as per Table B2.1 using the drilling method described in the corresponding Annex C.





Not necessary at base material group "c"


2. For use in base material group "a" (concrete), "b" (solid bricks), "d" (autoclaved aerated concrete): Remove dust from borehole.



3. Insert anchor (screw and sleeve) by using a hammer until the collar of the plastic sleeve is flush with the surface of the fixture.



4. The screw is screwed-in until the head of the screw touches the sleeve. The anchor is correctly installed, if the head of the screw fits tight on the surface and nor the anchor sleeve neither the screw cannot be turned-in any further.



5. Correctly installed anchor.

fischer frame fixing DuoXpand

Intended use

Installation instructions

Annex B 5

Table C1.1: Characteristic resistance of the screws

| Failure of expansion element (special screw) | DuoXpand 8 | | DuoXpand 10 | |
|---|------------------|-----------------|------------------|-----------------|
| | galvanised steel | stainless steel | galvanised steel | stainless steel |
| Characteristic tension resistance $N_{Rk,s}$ [kN] | 14,8 | 14,3 | 21,7 | 21,7 |
| Partial safety factor $\gamma_{Ms}^{1)}$ [-] | 1,50 | 1,55 | 1,55 | 1,55 |
| Characteristic shear resistance $V_{Rk,s}$ [kN] | 7,4 | 7,1 | 10,8 | 10,8 |
| Partial safety factor $\gamma_{Ms}^{1)}$ [-] | 1,25 | 1,29 | 1,29 | 1,29 |

Characteristic bending resistance of the screw

| | | | | |
|---|------|------|------|------|
| Characteristic bending resistance $M_{Rk,s}$ [Nm] | 12,4 | 12,0 | 20,6 | 20,6 |
| Partial safety factor $\gamma_{Ms}^{1)}$ [-] | 1,25 | 1,29 | 1,29 | 1,29 |

¹⁾ In absence of other national regulations.

Table C1.2: Characteristic resistance due to pullout-failure for use in concrete base material group “a”¹⁾

| Pull-out failure (plastic sleeve) | DuoXpand 8 | | DuoXpand 10 | |
|--|------------|-----|-------------------------|-----|
| Embedment depth h_{nom} [mm] | ≥ | 50 | 70 | 50 |
| Concrete ≥ C12/15 | | | | |
| Characteristic tension resistance (30/50 °C) $N_{Rk,p}$ [kN] | 3,5 | 4,0 | 3,5 / 4,0 ²⁾ | 5,0 |
| Characteristic tension resistance (50/80 °C) $N_{Rk,p}$ [kN] | 3,5 | 4,0 | 3,0 / 4,0 ²⁾ | 4,5 |
| Partial safety factor $\gamma_{Mc}^{3)}$ [-] | 1,8 | | | |

¹⁾ Drilling method: hammer drilling.

²⁾ Valid for concrete ≥ C16/20.

³⁾ In absence of other national regulations.

fischer frame fixing DuoXpand

Performances

Characteristic resistance and characteristic bending resistance of the screw

Characteristic resistance for use in concrete

Annex C 1

Table C2.1: Displacements¹⁾ under tension and shear loading in concrete, in solid bricks, in hollow or perforated bricks

| Displacements under | | | Tension load ²⁾ | | Shear load ²⁾ | |
|---------------------|--------------------------|-----------|------------------------------|--------------------------------------|------------------------------|-------------------------------|
| Anchor type | h_{nom} [mm] | F [kN] | δ_{NO} [mm] | $\delta_{\text{N}^{\infty}}$ [mm] | δ_{vo} [mm] | $\delta_{v^{\infty}}$ [mm] |
| DuoXpand 8 | 50 | 1,4 | 0,46 | 0,92 | 0,60 | 0,90 |
| | 70 | 1,6 | 0,45 | 0,90 | 0,63 | 0,95 |
| DuoXpand 10 | 50 | 1,6 | 0,59 | 1,18 | 0,68 | 1,02 |
| | 70 | 2,0 | 0,58 | 1,16 | 0,88 | 1,32 |
| | 140³⁾ | 1,6 | 0,59 | 1,18 | 0,68 | 1,02 |
| | 160³⁾ | 2,0 | 0,58 | 1,16 | 0,88 | 1,32 |

¹⁾ Valid for all ranges of temperatures.

²⁾ Intermediate values by linear interpolation.

³⁾ Only valid for Sepa Parpaing see Annex C 11.

Table C2.2: Displacements¹⁾ under tension and shear loading in reinforced and unreinforced autoclaved aerated concrete

| Displacements under | | | Tension load ²⁾ | | Shear load ²⁾ | | |
|---------------------|---|--------------------------|----------------------------|------------------------------|--------------------------------------|------------------------------|-------------------------------|
| Anchor type | $f_{ck}/f_{cm,\text{decl}}$ [N/mm ²] | h_{nom} [mm] | F [kN] | δ_{NO} [mm] | $\delta_{\text{N}^{\infty}}$ [mm] | δ_{vo} [mm] | $\delta_{v^{\infty}}$ [mm] |
| DuoXpand 8 | ≥ 2 | 70 | 0,11 | 0,13 | 0,26 | 0,22 | 0,33 |
| | ≥ 6 | 70 | 0,71 | 0,68 | 1,36 | 1,42 | 2,13 |
| DuoXpand 10 | ≥ 2 | 70 | 0,18 | 0,12 | 0,24 | 0,36 | 0,54 |
| | ≥ 6 | 70 | 0,32 | 0,66 | 1,32 | 0,64 | 0,96 |

¹⁾ Valid for all ranges of temperatures.

²⁾ Intermediate values by linear interpolation.

fischer frame fixing DuoXpand

Performances

Displacements under tension and shear loading in concrete, masonry and autoclaved aerated concrete

Annex C 2

Table C3.1: Summary of concrete - base material group “a”, solid bricks - base material group “b”¹⁾ and autoclaved aerated concrete - base material group “d”

| Base material | Format | Dimensions [mm] | Mean compressive strength as per EN 771 [N/mm ²] | Bulk density ρ [kg/dm ³] | See Annex |
|--|---------|--------------------|---|--|--------------|
| Concrete ≥ C12/15 as per EN 206:2013+A1:2016 | | | | | C 1 |
| Autoclaved aerated concrete, AAC, as per EN 771-4:2011+A1:2015 | | | | | C 13 |
| Reinforced autoclaved aerated concrete, AAC as per EN 12602:2016 | | | | | C 13 |
| Clay brick Mz, as per EN 771-1:2011+A1:2015 e.g. Mz Ziegelwerk Nordhausen, DE | ≥ NF | ≥ 240x115x71 | ≥ 10 | ≥ 1,8 | C 7 |
| Calcium silicate solid brick KS, as per EN 771-2:2011+A1:2015 e.g. KS Wemding, DE | ≥ NF | ≥ 240x115x71 | ≥ 10 | ≥ 2,0 | C 7 |
| Calcium silicate solid brick KS, as per EN 771-2:2011+A1:2015 e.g. KS Wemding, DE | ≥ 12 DF | ≥ 498x175x248 | ≥ 10 | ≥ 1,8 | C 7 |
| Lightweight solid brick Vbl, as per EN 771-3:2011+A1:2015 e.g. Vbl KLB, DE | ≥ 2 DF | ≥ 240x115x113 | ≥ 2,5 | ≥ 1,4 | C 8 |

¹⁾ Vertically perforation ≤ 15%; cross section reduced by perforation vertically to the resting area.

Table C3.2: Summary of hollow or perforated bricks – base material group “c”^{“1)}

| Base material | Format/ Dimensions [mm] | Brick drawing [mm] | Mean compressive strength as per EN 771 [N/mm ²] / bulk density ρ [kg/dm ³] | See Annex |
|--|-------------------------------|-----------------------|---|------------------|
| Perforated clay brick Hz as per EN 771-1:2011 +A1:2015 e.g. Wienerberger Hz, DE | 2 DF 240 x 115 x 113 | | ≥ 5,0 / ≥ 0,9 | C 8 |
| fischer frame fixing DuoXpand | | | | Annex C 3 |
| Performances Summary of concrete, solid bricks, autoclaved aerated concrete and hollow or perforated bricks | | | | Appendix 13 / 23 |

Table C4.1: Summary of hollow or perforated bricks – base material group “c”⁽¹⁾

| Base material | Format/ Dimensions [mm] | Brick drawing [mm] | Mean compressive strength as per EN 771 [N/mm ²] / bulk density ρ [kg/dm ³] | See Annex |
|---|-------------------------------|-----------------------|---|------------------|
| Perforated clay brick HLz, as per EN 771-1:2011 +A1:2015 e.g. Schlagmann, DE | 3 DF 240x175x113 | | ≥ 5,0 / ≥ 0,9 | C 8 |
| Perforated clay brick HLz as per EN 771-1:2011 +A1:2015 e.g. Wienerberger Porotherm 30 R, FR | 370x300x250 | | ≥ 7,5 / ≥ 0,7 | C 9 |
| Perforated clay brick HLz, as per EN 771-1:2011 +A1:2015 e.g. Doppio Uni IT Wienerberger, IT | 250x120x190 | | ≥ 5,0 / ≥ 0,9 | C 9 |
| fischer frame fixing DuoXpand | | | | Annex C 4 |
| Performances Summary of hollow or perforated bricks | | | | Appendix 14 / 23 |

Table C5.1: Summary of hollow or perforated bricks – base material group “c”⁽¹⁾

| Base material | Format/ Dimensions [mm] | Brick drawing [mm] | Mean compressive strength as per EN 771 [N/mm ²] / bulk density ρ [kg/dm ³] | See Annex |
|---|-------------------------------|-----------------------|--|------------------|
| Perforated clay brick HLz as per EN 771-1:2011 +A1:2015 e.g. Wienerberger Pth Bio Modulare, DE | 8 DF 300x250x190 | | $\geq 7,5 / \geq 1,0$ | C 9 |
| Calcium silicate hollow brick KSL, as per EN 771-1:2011 +A1:2015 e.g. Bösel, DE | 2 DF 240x115x113 | | $\geq 10 / \geq 1,6$ | C 10 |
| Calcium silicate hollow brick KSL, as per EN 771-1:2011 +A1:2015 e.g. KS Wemding, DE | 3 DF 240x175x113 | | $\geq 10 / \geq 1,4$ | C 10 |
| fischer frame fixing DuoXpand | | | | Annex C 5 |
| Performances Summary of hollow or perforated bricks | | | | Appendix 15 / 23 |

Table C6.1: Summary of hollow or perforated bricks – base material group “c”⁽¹⁾

| Base material | Format/ Dimensions [mm] | Brick drawing [mm] | Mean compressive strength as per EN 771 [N/mm ²] / bulk density ρ [kg/dm ³] | See Annex |
|---|-------------------------------|-----------------------|---|--------------|
| Hollow brick lightweight concrete Hbl, as per EN 771-3:2011 +A1:2015, e.g. Knobel, DE | 16DF 495x240x248 | | ≥ 2,5 / ≥ 0,7 | C 10 |
| Hollow brick lightweight concrete Hbl, as per EN 771-3:2011 +A1:2015, e.g. Sepa Parpaing, FR | 500x200x200 | | ≥ 2,5 / ≥ 1,0 | C 11 |
| Hollow brick lightweight concrete Hbl, as per EN 771-3:2011 +A1:2015, e.g. Indelasa, ES | 500x200x200 | | ≥ 2,5 / ≥ 1,0 | C12 |
| Hollow brick lightweight concrete Hbl, as per EN 771-3:2011 +A1:2015, e.g. Knobel, DE | 500x240x240 | | ≥ 2,5 / ≥ 0,9 | C 12 |
| fischer frame fixing DuoXpand | | | | |
| Performances Summary of hollow or perforated bricks | | | Annex C 6 Appendix 16 / 23 | |

Table C7.1: Characteristic resistance F_{Rk} in [kN] for use in solid masonry - base material group “b”

| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771 [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | | | |
|--|--|--|-------------------------------|-------------------------------|--|
| | | DuoXpand 8 | | DuoXpand 10 | |
| | | h_{nom} [mm] | | | |
| | | ≥ 50 | ≥ 70 | ≥ 50 | ≥ 70 |
| Clay brick Mz as per EN 771-1:2011+A1:2015 e.g. Mz Ziegelwerk Nordhausen, DE \geq NF ($\geq 240 \times 115 \times 71$) Hammer drilling | $\geq 12,5$ | 1,5 | 1,5 | 0,9 / 1,5⁷⁾ | 0,9 / 2,0⁷⁾ |
| | $\geq 15,0$ | 2,0 | 2,0 | 1,2 / 2,0⁷⁾ | 1,2 / 2,0⁷⁾ |
| | $\geq 20,0$ | 2,5 | 2,5 | 1,5 / 2,5⁷⁾ | 1,5 / 3,0⁷⁾ |
| | $\geq 25,0$ | 3,0 | 3,5 | 2,0 / 3,0⁷⁾ | 2,0 / 3,5⁷⁾ |
| | $\geq 35,0$ | 4,5 | 5,0 | 3,0 / 4,5⁷⁾ | 3,0 / 5,0⁷⁾ |
| | $\geq 37,3$ | 4,5 | 5,0 | 3,0 / 4,5⁷⁾ | 3,0 / 5,5⁷⁾ |
| Clay brick Mz as per EN 771-1:2011+A1:2015 e.g. Mz Ziegelwerk Nordhausen, DE \geq NF ($\geq 240 \times 115 \times 71$) Rotary drilling | $\geq 10,0$ | 1,5 | 2,0 | 1,5 | 2,0 / 2,5²⁾ |
| | $\geq 12,5$ | 2,0 | 2,5 | 2,0 | 2,5 / 3,0²⁾ / 3,5⁵⁾ |
| | $\geq 15,0$ | 2,5 | 3,0 | 2,5 | 3,0 / 4,0²⁾ |
| | $\geq 18,5$ | 3,0 | 3,5 | 3,0 | 4,0 / 4,5²⁾ / 5,0³⁾ |
| Calcium silicate solid brick KS as per EN 771-2:2011+A1:2015 e.g. KS Wemding, DE \geq NF ($\geq 240 \times 115 \times 71$) Hammer drilling | $\geq 10,0$ | 1,2 / 1,5¹⁾ | 1,5 | 1,5 | 1,5 / 2,0⁶⁾ |
| | $\geq 12,5$ | 1,5 | 2,0 | 2,0 | 2,0 / 2,5²⁾ |
| | $\geq 15,0$ | 2,0 | 2,5 | 2,5 | 2,5 / 3,0²⁾ |
| | $\geq 20,0$ | 2,5 | 3,0 / 3,5⁴⁾ | 3,0 / 3,5²⁾ | 3,5 / 4,0²⁾ |
| | $\geq 25,0$ | 3,5 | 4,0 | 4,0 / 4,5⁴⁾ | 4,0 / 4,5⁶⁾ / 5,0²⁾ |
| | $\geq 30,0$ | 4,0 | 4,5 / 5,0²⁾ | 4,5 / 5,0²⁾ | 5,0 / 5,5⁶⁾ / 6,0²⁾ |
| Calcium silicate solid brick KS as per EN 771-2:2011+A1:2015 e.g. KS Wemding, DE \geq 12 DF ($\geq 498 \times 175 \times 248$) Hammer drilling | $\geq 10,0$ | 1,5 | 2,0 | 2,0 | 2,0 / 2,5⁶⁾ |
| | $\geq 12,5$ | 2,0 | 2,5 | 2,5 | 2,5 / 3,0⁶⁾ |
| | $\geq 15,0$ | 2,5 | 3,0 | 3,0 | 3,0 / 3,5⁶⁾ / 4,0²⁾ |
| | $\geq 20,0$ | 3,5 | 3,5 | 3,5 | 4,0 / 4,5⁶⁾ / 5,0²⁾ |
| | $\geq 25,0$ | 4,5 | 4,5 | 4,5 | 5,0 / 6,0⁶⁾ / 6,5²⁾ |
| | $\geq 26,5$ | 4,5 | 5,0 | 5,0 | 5,5 / 6,0⁶⁾ / 6,5²⁾ |
| Partial safety factor | γ_{Mm} ⁸⁾ | [$-$] | | 2,5 | |

¹⁾ Only valid for temperature range “c” (30/50 °C).

²⁾ Only valid for c_{1min} 120 mm and c_{2min} 180 mm.

³⁾ Only valid for c_{1min} 130 mm and c_{2min} 195 mm.

⁴⁾ Only valid for c_{1min} 120 mm and c_{2min} 180 mm for temperature range “c” (30/50 °C).

⁵⁾ Only valid for c_{1min} 130 mm and c_{2min} 195 mm for temperature range “c” (30/50 °C).

⁶⁾ Only valid for c_{1min} 110 mm and c_{2min} 165 mm.

⁷⁾ Only valid for $s_{2,min}$ 250 mm.

⁸⁾ In absence of other national regulations.


fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in solid masonry

Annex C 7

Table C8.1: Characteristic resistance F_{Rk} in [kN] for use in solid and in hollow or perforated masonry - base material group "b" and "c"
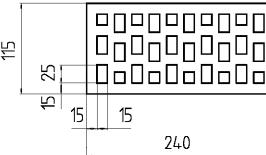
| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771 [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | | | |
|---|--|--|--------------------------|--------------------------|--------------------------|
| | | h_{nom} [mm] ¹⁾ | | DuoXpand 8 | DuoXpand 10 |
| | | h_{nom} [mm] ¹⁾ | | | |
| | | 50 | 70 | 50 | 70 |
| Lightweight solid brick Vbl as per EN 771-3:2011+A1:2015 e.g. Vbl KLB, DE ≥ 2 DF ($\geq 240 \times 115 \times 113$) Rotary drilling | $\geq 2,5$ | 0,4 | 0,6 | 0,3 | 0,6 / 0,75 ²⁾ |
| | $\geq 5,0$ | 0,75 / 0,9 ²⁾ | 1,2 | 0,6 / 0,75 ²⁾ | 1,2 / 1,5 ²⁾ |
| Perforated clay brick Hz as per EN 771-1:2011+A1:2015 e.g. Wienerberger Hz, DE  | $\geq 5,0$ | 0,5 | 0,4 | 0,4 | 0,4 |
| | $\geq 7,5$ | 0,75 | 0,6 | 0,6 | 0,6 |
| | $\geq 10,0$ | 0,9 | 0,75 | 0,9 | 0,75 |
| | $\geq 10,9$ | 0,9 | 0,75 | 0,9 | 0,9 |
| Perforated clay brick Hz as per EN 771-1:2011+A1:2015 e.g. Schlagmann, DE  | $\geq 5,0$ | 0,3 | 0,5 / 0,6 ²⁾ | 0,3 | 0,5 / 0,6 ²⁾ |
| | $\geq 7,5$ | 0,4 | 0,75 / 0,9 ²⁾ | 0,4 / 0,5 ²⁾ | 0,75 / 0,9 ²⁾ |
| | $\geq 10,0$ | 0,6 | 0,9 / 1,2 ²⁾ | 0,6 | 1,2 |
| | $\geq 12,5$ | 0,75 | 1,2 / 1,5 ²⁾ | 0,75 | 1,2 / 1,5 ²⁾ |
| | $\geq 15,0$ | 0,9 | 1,5 | 0,9 | 1,5 / 2,0 ²⁾ |
| | $\geq 16,2$ | 0,9 | 1,5 / 2,0 ²⁾ | 0,9 | 1,5 / 2,0 ²⁾ |
| Partial safety factor | $\gamma_{Mm}^{3)}$ [-] | 2,5 | | | |

¹⁾ The lowest resistance of two consecutive embedment depths may be used for the intermediate embedment depths.

Exception for "Lightweight solid brick Vbl": here $\geq h_{nom}$ is valid

²⁾ Only valid for temperature range "c" (30/50 °C).

³⁾ In absence of other national regulations.




fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in solid and in hollow or perforated masonry

Annex C 8

Table C9.1: Characteristic resistance F_{Rk} in [kN] for use in hollow or perforated masonry - base material group “c”
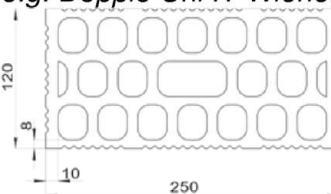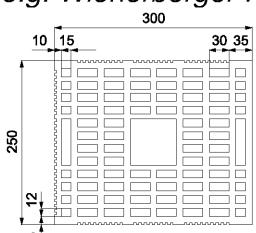
| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771 [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | | | |
|---|--|--|------|-------------|-------------------------|
| | | DuoXpand 8 | | DuoXpand 10 | |
| | | h_{nom} [mm] ¹⁾ | | | |
| | | 50 | 70 | 50 | 70 |
| Perforated clay brick HLz as per EN 771-1:2011+A1:2015 e.g. <i>Wienerberger Porotherm 30 R, FR</i>  | ≥ 7,5 | 0,3 | 0,3 | 0,3 | 0,3 |
| | ≥ 10,0 | 0,4 | 0,4 | 0,4 | 0,4 |
| | ≥ 12,5 | 0,5 | 0,5 | 0,5 | 0,5 / 0,6 ²⁾ |
| | ≥ 15,0 | 0,6 | 0,6 | 0,6 | 0,6 |
| | ≥ 17,6 | 0,75 | 0,75 | 0,75 | 0,75 |
| Perforated clay brick HLz as per EN 771-1:2011+A1:2015 e.g. <i>Doppio Uni IT Wienerberger, IT</i>  | ≥ 5,0 | 0,4 | 0,4 | 0,5 | 0,5 |
| | ≥ 7,5 | 0,6 | 0,5 | 0,75 | 0,75 |
| | ≥ 10,0 | 0,75 | 0,75 | 0,9 | 0,9 |
| | ≥ 12,5 | 0,9 | 0,9 | 1,2 | 1,2 |
| | ≥ 15,0 | 1,2 | 1,2 | 1,5 | 1,5 |
| | ≥ 18,7 | 1,5 | 1,2 | 2,0 | 2,0 |
| Perforated clay brick HLz as per EN 771-1:2011+A1:2015 e.g. <i>Wienerberger Pth Bio Modulare, IT</i>  | ≥ 7,5 | 0,75 | 0,75 | 0,75 | 0,75 |
| | ≥ 10,0 | 0,9 | 0,9 | 0,9 | 0,9 |
| | ≥ 12,5 | 1,2 | 1,2 | 1,2 | 1,2 |
| | ≥ 15,0 | 1,5 | 1,5 | 1,5 | 1,5 |
| | ≥ 20,0 | 2,0 | 2,0 | 2,0 | 2,0 |
| | ≥ 23,6 | 2,5 | 2,5 | 2,5 | 2,5 |
| | Partial safety factor | $\gamma_{Mm}^{3)}$ [-] | 2,5 | | |

¹⁾ The lowest resistance of two consecutive embedment depths may be used for the intermediate embedment depths.

²⁾ Only valid for temperature range “c” (30/50 °C).

³⁾ In absence of other national regulations.

fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 9

Table C10.1: Characteristic resistance F_{Rk} in [kN] for use in hollow or perforated masonry - base material group „c“

| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771 [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | | | |
|--|---|--|--------------------------|--------------------------|-------------------------|
| | | DuoXpand 8 | | DuoXpand 10 | |
| | | h_{nom} [mm] ¹⁾ | | | |
| | | 50 | 70 | 50 | 70 |
| Calcium silicate hollow brick KSL as per EN 771-1:2011+A1:2015 e.g. Bösel, DE | ≥ 10,0 | 0,75 / 0,9 ²⁾ | 0,9 | 0,9 / 1,2 ²⁾ | 1,2 |
| | ≥ 12,5 | 0,9 / 1,2 ²⁾ | 1,2 | 1,2 / 1,5 ²⁾ | 1,5 |
| | ≥ 15,0 | 1,2 / 1,5 ²⁾ | 1,5 | 1,5 | 2,0 |
| | ≥ 20,0 | 1,5 / 2,0 ²⁾ | 2,0 | 2,0 / 2,5 ²⁾ | 2,5 |
| | ≥ 25,0 | 2,0 | 2,5 | 2,5 / 3,0 ²⁾ | 3,0 |
| | ≥ 25,7 | 2,0 / 2,5 ²⁾ | 2,5 | 2,5 / 3,0 ²⁾ | 3,5 |
| Calcium silicate hollow brick KSL as per EN 771-1:2011+A1:2015 e.g. KS Wemding, DE | ≥ 10,0 | 0,9 | 0,75 / 0,9 ²⁾ | 0,6 / 0,75 ²⁾ | 0,9 / 1,2 ²⁾ |
| | ≥ 12,5 | 1,2 | 0,9 / 1,2 ²⁾ | 0,75 / 0,9 ²⁾ | 1,2 / 1,5 ²⁾ |
| | ≥ 15,0 | 1,2 / 1,5 ²⁾ | 1,2 / 1,5 ²⁾ | 0,9 / 1,2 ²⁾ | 1,5 |
| | ≥ 20,0 | 1,5 / 2,0 ²⁾ | 1,5 / 2,0 ²⁾ | 1,2 / 1,5 ²⁾ | 2,0 |
| | ≥ 21,4 | 1,5 / 2,0 ²⁾ | 1,5 / 2,0 ²⁾ | 1,2 / 1,5 ²⁾ | 2,0 / 2,5 ²⁾ |
| | | | | | |
| Hollow brick lightweight concrete Hbl as per EN 771-3:2011+A1:2015 e.g. Knobel, DE | ≥ 2,5 | 0,5 / 0,6 ²⁾ | 0,5 / 0,6 ²⁾ | 0,75 | 0,75 |
| | ≥ 5,0 | 0,9 / 1,2 ²⁾ | 0,9 / 1,2 ²⁾ | 1,5 | 1,5 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Partial safety factor | γ_{Mm} ³⁾ [-] | 2,5 | | | |

¹⁾ The lowest resistance of two consecutive embedment depths may be used for the intermediate embedment depths.

²⁾ Only valid for temperature range "c" (30/50 °C).

³⁾ In absence of other national regulations.


fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 10

Table C11.1: Characteristic resistance F_{Rk} in [kN] for use in hollow or perforated masonry - base material group „c“
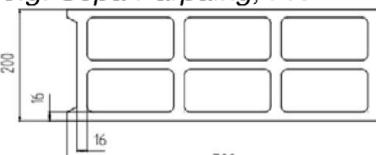
| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771 [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | | | | | |
|--|---|--|---------------|-------------------------|--------------------------|---------------|-------------------------|
| | | DuoXpand 8 | | DuoXpand 10 | | | |
| | | h _{nom} [mm] ¹⁾ | | | | | |
| | | 50 | 70 | 50 | 70 | 140 | 160 |
| Hollow brick lightweight concrete Hbl as per EN 771-3:2011+A1:2015 e.g. Sepa Parpaing, FR  | ≥ 2,5 | 0,3 / 0,4 ²⁾ | ³⁾ | 0,5 | 0,5 | ³⁾ | 0,3 |
| | ≥ 5,0 | 0,75 | 0,5 | 0,9 | 0,9 | 0,5 | 0,5 |
| | ≥ 6,9 | 0,9 / 1,2 ²⁾ | 0,6 | 1,5 | 1,5 | 0,6 | 0,75 |
| Hollow brick lightweight concrete Hbl as per EN 771-3:2011+A1:2015 e.g. Sepa Parpaing, FR  | ≥ 2,5 | ³⁾ | ³⁾ | ³⁾ | 0,3 | ³⁾ | ³⁾ |
| | ≥ 5,0 | 0,3 | ³⁾ | 0,3 / 0,4 ²⁾ | 0,6 | ³⁾ | 0,3 / 0,4 ²⁾ |
| | ≥ 6,9 | 0,4 / 0,5 ²⁾ | ³⁾ | 0,4 / 0,5 ²⁾ | 0,75 / 0,9 ²⁾ | ³⁾ | 0,4 / 0,6 ²⁾ |
| Partial safety factor | $\gamma_{Mm}^{4)}$ [-] | 2,5 | | | | | |

¹⁾ The lowest resistance of two consecutive embedment depths may be used for the intermediate embedment depths.

²⁾ Only valid for temperature range "c" (30/50 °C).

³⁾ No performance assessed.

⁴⁾ In absence of other national regulations.

fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 11

Table C12.1: Characteristic resistance F_{Rk} in [kN] for use in hollow or perforated masonry - base material group „c“

| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771 [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | | | |
|--|--|--|--------------------------------|-------------------------------|-------------------------------|
| | | DuoXpand 8 | | DuoXpand 10 | |
| | | h_{nom} [mm] | | | |
| | | 50 | 70 | 50 | 70 |
| Hollow brick lightweight concrete Hbl as per EN 771-3:2011+A1:2015 e.g. Indelasa, ES | $\geq 2,5$ | 0,6 | 0,5 | 0,4 | 0,6 |
| | | $\geq 4,8$ | 1,2 | 0,9 | 0,75 |
| 500x200x200 Rotary drilling | | | | | 0,9 / 1,2²⁾ |
| Hollow brick lightweight concrete Hbl as per EN 771-3:2011+A1:2015 e.g. Knobel, DE | $\geq 2,5$ | 0,9 | 0,75 / 0,9²⁾ | 0,9 | 0,6 |
| | | $\geq 5,0$ | 1,5 / 2,0²⁾ | 1,5 / 2,0²⁾ | 2,0 |
| | | $\geq 6,2$ | 2,0 / 2,5²⁾ | 2,0 / 2,5²⁾ | 2,5 |
| 500x240x240 Rotary drilling | | | | | 1,5 |
| Partial safety factor | $\gamma_{Mm}^{3)}$ [-] | 2,5 | | | |

¹⁾ The lowest resistance of two consecutive embedment depths may be used for the intermediate embedment depths.

²⁾ Only valid for temperature range "c" (30/50 °C).

³⁾ In absence of other national regulations.

fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 12

Table C13.1: Characteristic resistance F_{Rk} in [kN] for use in autoclaved aerated concrete - base material group „d“

| Base material [Supplier Title, country] Geometry, DF or nom. Size (L x W x H) [mm] and drilling method | Mean compressive strength as per EN 771-4 $f_{cm,decl}$ [N/mm ²] | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | |
|---|--|--|-------------------------|
| | | DuoXpand 8 | DuoXpand 10 |
| | | h_{nom} [mm] | |
| | | ≥ 70 | |
| Autoclaved aerated concrete, AAC as per EN 771-4:2011+A1:2015 e.g. (500x120x300) e.g. (500x250x300) Hammer drilling | 2,8 | 0,3 | 0,4 / 0,5 ¹⁾ |
| | 4,0 | 0,75 | 0,6 |
| | 5,0 | 0,9 / 1,2 ¹⁾ | 0,75 |
| | 6,9 | 1,5 / 2,0 ¹⁾ | 0,9 |
| Partial safety factor | $\gamma_{MAAC}^{2)}$ [-] | | 2,0 |

¹⁾ Only valid for temperature range "c" (30/50 °C).

²⁾ In absence of other national regulations.

Table C13.2: Characteristic resistance F_{Rk} in [kN] for use in reinforced autoclaved aerated concrete - base material group „d“

| Base material [Supplier Title, country] minimum member thickness h_{min} and drilling method | Compressive strength f_{ck} [N/mm ²] (compressive strength class) as per EN 12602 | Characteristic resistance F_{Rk} [kN] Temperature range 30/50 °C and 50/80 °C | |
|---|---|--|--------------------------|
| | | DuoXpand 8 | DuoXpand 10 |
| | | h_{nom} [mm] | |
| | | ≥ 70 | |
| Reinforced autoclaved aerated concrete, AAC as per EN 12602:2016 $h_{min} = 100$ mm ³⁾ Hammer drilling | ≥ 2,0 (AAC 2) | 2) | 2) / 0,3 ¹⁾ |
| | ≥ 2,5 (AAC 2,5) | 2) | 0,3 / 0,4 ¹⁾ |
| | ≥ 3,0 (AAC 3) | 2) | 0,4 |
| | ≥ 3,5 (AAC 3,5) | 2) | 0,4 / 0,5 ¹⁾ |
| | ≥ 4,0 (AAC 4) | 2) | 0,5 / 0,6 ¹⁾ |
| | ≥ 4,5 (AAC 4,5) | 2) | 0,6 / 0,75 ¹⁾ |
| | ≥ 5,0 (AAC 5) | 2) | 0,75 |
| | ≥ 6,0 (AAC 6) | 2) | 0,9 |
| Partial safety factor | $\gamma_{MAAC}^{4)}$ [-] | | 2,0 |

¹⁾ Only valid for temperature range "c" (30/50 °C).

²⁾ No performance assessed.

³⁾ For anchor groups in AAC 6 $h_{min} = 175$ mm.

⁴⁾ In absence of other national regulations.

fischer frame fixing DuoXpand

Performances

Characteristic resistance for use in autoclaved aerated concrete and in reinforced autoclaved aerated concrete

Annex C 13