





74WR-25

1/4" Square Drive Mechanical Adjustable Window Torque Click Wrench 5 N.m-25 N.m



PRODUCT DETAILS

- Durable, reliable and accurate mechanism
- Fast scale adjustment reducing the effort required to adjust
- TIMESTRIP visual indication that the wrench is due for re-calibration and has 3, 6, 9 and 12-month graduations
- Large dual scale in N·m/in.lb
- Range covering from 3 to 25 N·m/27 - 220 in.lb torque values
- Can only be used clockwise
- Accurate to $\pm 3\%$ of reading which exceeds the requirements of ISO6789-1:2017
- Clicking system triggers a tactile and audible signal
- Reversible ratchet head with 1/4" square drives allowing CW operation only
- Handle centre or calibration force point marked on handle
- Lock/unlock knob with blue ring inside to warn the operator the wrench is unlocked
- In a semi-transparent square tube with eurohole hanger
- All wrenches come with a factory calibration certificate according to ISO 6789-2:2017
- Made in the UK

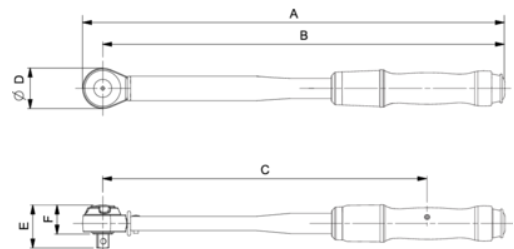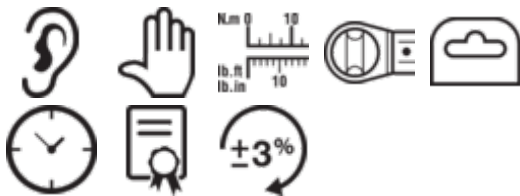







Follow the Fish!



PRODUCT ATTRIBUTES

Product: **74WR-25**

| | | | | | |
|---|---------|---|--------------|---|----------|
|  | 5-25 Nm |  | 44-220 lb·in |  | 1/4 in |
|  | 0,2 Nm |  | 2 lb·in | A | 221 mm |
| B | 209 mm | C | 140 mm | D | 25 mm |
| E | 25 mm | F | 18 mm |  | 0.300 kg |

Follow the Fish!

